


规格SPECIFICATIONS

间距(PITCH): 1.5mm
 极数(Poles): 2~12
 适用电线范围(Useable wire range): AWG 30#~26#
 适用印制板厚度(Applicable PC board thickness): 0.6~1.2mm
 额定电流(Current rating): 1A, AC, DC
 额定电压(Voltage rating): 250V, AC, DC
 工作温度(Working Temperature): -25℃~+85℃
 相对湿度(Relative humidity): 93%+40℃
 耐压值(Withstand voltage): 500V/min
 接触电阻(Contact resistance): < 0.01Ω
 绝缘电阻(Insulation resistance): ≥ 500mΩ


材料MATERIAL

孔座(HOUSING): 尼龙66(NYLON66 UL94V-0)
 针座(PINHEADER):
 1、基座(WATER): 尼龙66\46(NYLON66\46UL94V-0)
 2、插针(PIN): 黄铜(BRASS)
 端子(TERMINAL): 磷青铜(PHOSPHOR BRONZE)


ZH-T

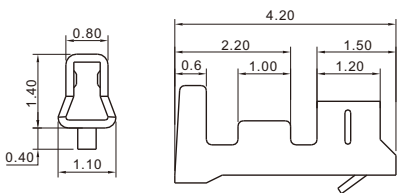


ZH-AB

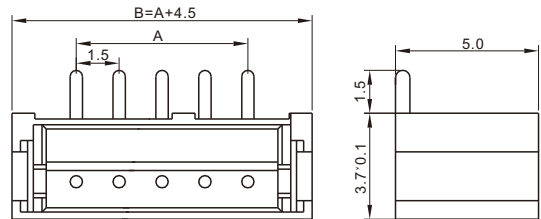


ZH-Y

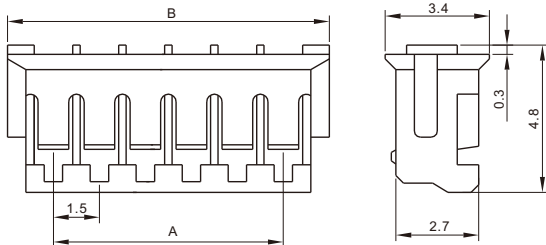


ZH-AWB

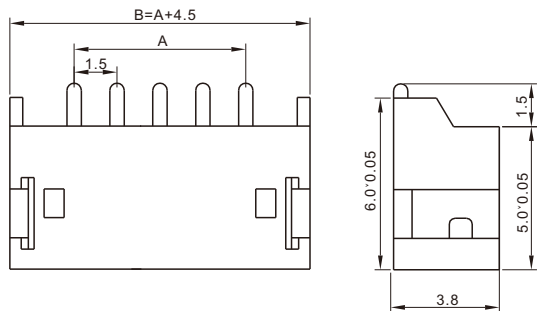

ZH-A

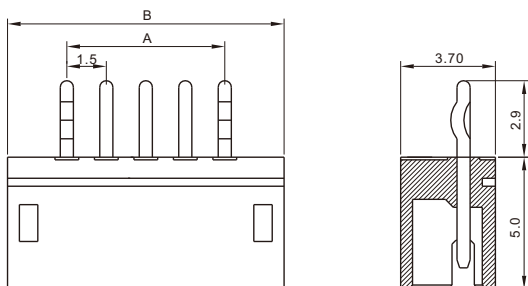

ZH-AW

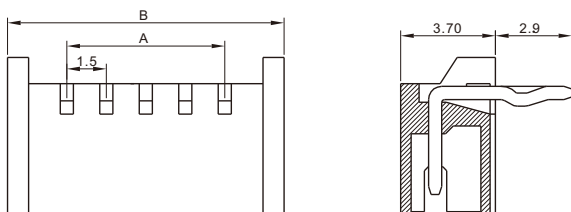

线数 poles	型号(Type)					A	B
2	ZH-2Y	ZH-2A	ZH-2AW	ZH-2AWB	ZH-2AB	1.50	4.50
3	ZH-3Y	ZH-3A	ZH-3AW	ZH-3AWB	ZH-3AB	3.00	6.00
4	ZH-4Y	ZH-4A	ZH-4AW	ZH-4AWB	ZH-4AB	4.50	7.50
5	ZH-5Y	ZH-5A	ZH-5AW	ZH-5AWB	ZH-5AB	6.00	9.00
6	ZH-6Y	ZH-6A	ZH-6AW	ZH-6AWB	ZH-6AB	7.50	10.50
7	ZH-7Y	ZH-7A	ZH-7AW	ZH-7AWB	ZH-7AB	9.00	12.00
8	ZH-8Y	ZH-8A	ZH-8AW	ZH-8AWB	ZH-8AB	10.50	13.50
9	ZH-9Y	ZH-9A	ZH-9AW	ZH-9AWB	ZH-9AB	12.00	15.00
10	ZH-10Y	ZH-10A	ZH-10AW	ZH-10AWB	ZH-10AB	13.50	16.50
11	ZH-11Y	ZH-11A	ZH-11AW	ZH-11AWB	ZH-11AB	15.00	18.00
12	ZH-12Y	ZH-12A	ZH-12AW	ZH-12AWB	ZH-12AB	16.50	19.50