


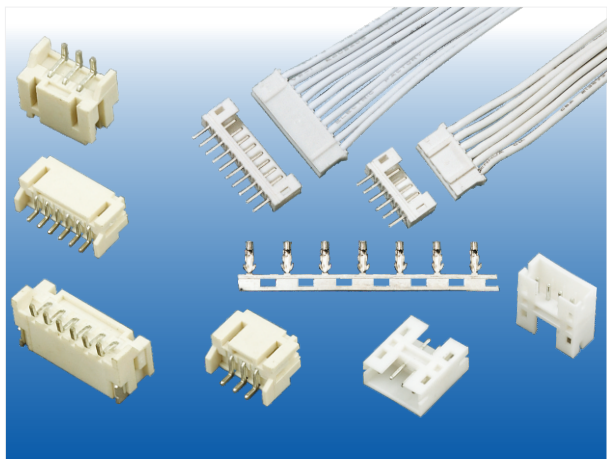


规格SPECIFICATIONS

间距(PITCH): 2.0mm
极数(Poles): 2~16
适用电线范围(Useable wire range): AWG 30# ~ 26#
适用印制板厚度(Applicable PC board thickness): 0.8mm
额定电流(Current rating): 1A, AC, DC
额定电压(Voltage rating): 100V, AC, DC
工作温度(Working Temperature): -25℃ ~ +85℃
相对湿度(Relative humidity): 94%+40℃
耐压值(Withstand voltage): 800V, AC/min
接触电阻(Contact resistance): $\leq 0.01\Omega$
绝缘电阻(Insulation resistance): $\geq 500m\Omega$


材料MATERIAL

孔座(HOUSING): 尼龙66 (NYLON66 UL94V-0)
针座(PINHEADER):
1、基座(WATER): 尼龙66\46 (NYLON66\46 UL94V-0)
2、插针(PIN): 黄铜 (BRASS)
端子(TERMINAL): 磷青铜 (PHOSPHOR BRONZE)


PH-T

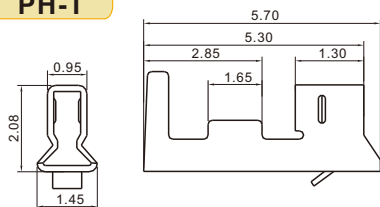


PH-Y

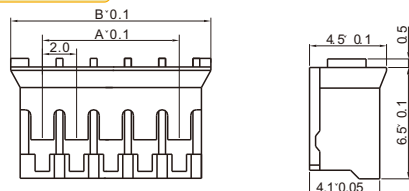


PH-A

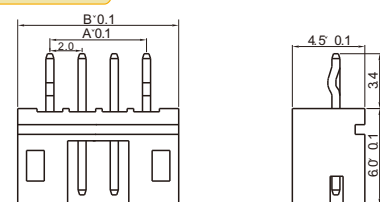


PH-AWD

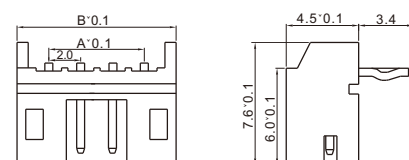


PH-AH

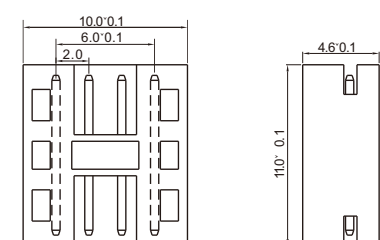

PH-AB

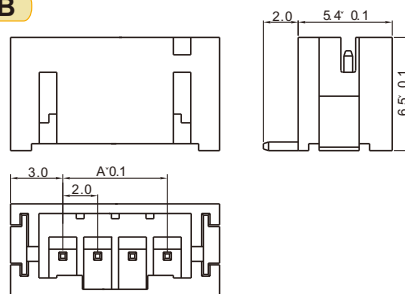

PH-AWB

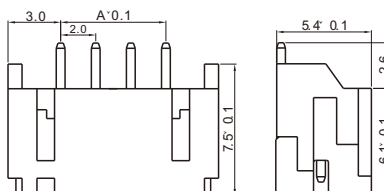

线数 poles	型号(Type)					A	B
2	PH-2Y	PH-2A	PH-2AWD	PH-2AWB	PH-2AB	2.00	6.00
3	PH-3Y	PH-3A	PH-3AWD	PH-3AWB	PH-3AB	4.00	8.00
4	PH-4Y	PH-4A	PH-4AWD	PH-4AWB	PH-4AB	6.00	10.00
5	PH-5Y	PH-5A	PH-5AWD	PH-5AWB	PH-5AB	8.00	12.00
6	PH-6Y	PH-6A	PH-6AWD	PH-6AWB	PH-6AB	10.00	14.00
7	PH-7Y	PH-7A	PH-7AWD	PH-7AWB	PH-7AB	12.00	16.00
8	PH-8Y	PH-8A	PH-8AWD	PH-8AWB	PH-8AB	14.00	18.00
9	PH-9Y	PH-9A	PH-9AWD	PH-9AWB	PH-9AB	16.00	20.00
10	PH-10Y	PH-10A	PH-10AWD	PH-10AWB	PH-10AB	18.00	22.00
11	PH-11Y	PH-11A	PH-11AWD	PH-11AWB	PH-11AB	20.00	24.00
12	PH-12Y	PH-12A	PH-12AWD	PH-12AWB	PH-12AB	22.00	26.00
13	PH-13Y	PH-13A	PH-13AWD	PH-13AWB	PH-13AB	24.00	28.00
14	PH-14Y	PH-14A	PH-14AWD	PH-14AWB	PH-14AB	26.00	30.00
15	PH-15Y	PH-15A	PH-15AWD	PH-15AWB	PH-15AB	28.00	32.00
16	PH-16Y	PH-16A	PH-16AWD	PH-16AWB	PH-16AB	30.00	34.00