


规格SPECIFICATIONS

间距(PITCH): 2.0mm
 极数(Poles): 2~16
 适用电线范围(Useable wire range): AWG30#~24#
 适用印制板厚度(Applicable PC board thickness): 1.2~1.6mm
 额定电流(Current rating): 2A, AC, DC
 额定电压(Voltage rating): 250V, AC, DC
 工作温度(Working Temperature): -25℃ ~ +85℃
 耐压值(Withstand voltage): 800V, AC /min
 接触电阻(Contact resistance): $\leq 0.01\Omega$
 绝缘电阻(Insulation resistance): $\geq 1000m\Omega$

材料MATERIAL


孔座(HOUSING): 尼龙66 UL94V-0 (NYLON66 UL94V-0)
 端子(TERMINAL): 磷青铜 (PHOSPHOR BRONZE)

SAN-T

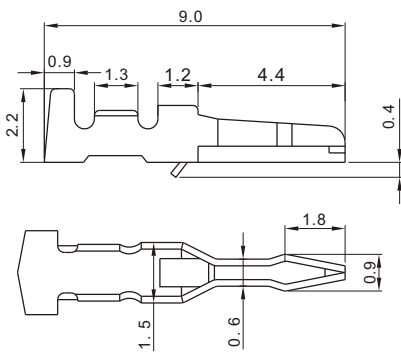


装配图

ASSEMBLY DIAGRAM

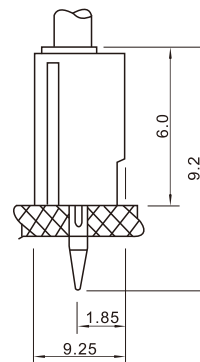

SAN-P

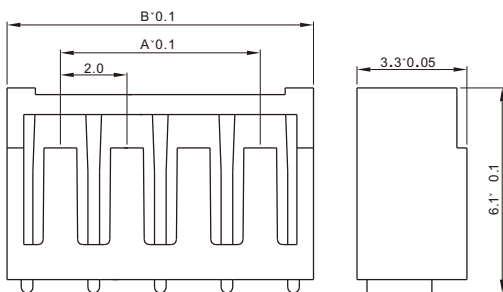

线数 poles	型号(Type)	A	B
2	SAN-2P	2.00	5.20
3	SAN-3P	4.00	7.20
4	SAN-4P	6.00	9.20
5	SAN-5P	8.00	11.20
6	SAN-6P	10.00	13.20
7	SAN-7P	12.00	15.20
8	SAN-8P	14.00	17.20
9	SAN-9P	16.00	19.20
10	SAN-10P	18.00	21.20
11	SAN-11P	20.00	23.20
12	SAN-12P	22.00	25.20
13	SAN-13P	24.00	27.20
14	SAN-14P	26.00	29.20
15	SAN-15P	28.00	31.20
16	SAN-16P	30.00	33.20